SAFC®

sartorius stedim biotech

Solution-driven innovation for biomanufacturing

Rapid and scalable buffer preparation with SAFC® powdered buffers and Sartorius Stedim Biotech single-use magnetic mixer

Application Note

#13

#14

#15

#16

#17

Executive Summary
This application note presents a new approach to increase the speed and consistency of buffer preparation steps in bio manufacturing. The method combines the benefits of ready to use buffer formulations from SAFC®, with scalable, high efficiency, single-use mixing systems provided by Sartorius Stedim Biotech. The mixing system is a key component of FlexAct BP, a configurable disposable solution for buffer preparation.

Three examples of large volume buffer preparation steps (Tris | Tris HCl | NaCl, citric acid | sodium citrate | NaCl, PBS), in nominal (x1) or concentrated (x20) forms are presented. The contained transfer of powdered buffer formulations into the high torque single-use mixing system enables a rapid dissolution and dispersion of the buffer powders in liquid for volumes of 50 L to 1,000 L. The performances of the single-use mixing system are characterized with quantitative (conductivity measurement) and qualitative (visual inspection) techniques. The proposed method and system provide seamless scale-up and consistent rapid buffer mixing for process development and GMP manufacturing.

200L Flexel® with Magnetic Mixer Technology

Introduction
This application study presents the performances of a fully single-use mixing solution for the large scale preparation of three different SAFC® buffers. The mixing technology selected for this application is Flexel® for Magnetic Mixer[1] with volumes of 50L, 200L and 1,000L. The magnetic coupling of the impeller with the Magnetic Mixer Drive Unit enables a rotation speed up to 300rpm, providing a powerful mixing of the buffer salts. The three SAFC® buffer solutions prepared in this application study (Citric acid | sodium citrate, PBS and Tris buffer) are commonly used in biomanufacturing. Examples of applications using these buffers include storage and distribution of concentrated buffer, tangential flow filtration, pH re-equilibration, and final formulation.

The study will investigate the mixing performances for buffer preparation at different volumes of single-use bags (50 L, 200 L, 1,000 L), and at different transient concentrations of powders (16 g/L, 73 g/L, 224 g/L) before the final dilution.

Purpose of the application study
The purpose of this application study is to assess the performances of the Flexel® for Magnetic Mixer technology to dissolve the following SAFC® powders used in the buffer preparation:
- TRI buffer: Citric Acid, Sodium Citrate, Sodium Chloride (final concentration = 14.4 g/L)
- Tris buffer: Tris, Tris HCl, Sodium Chloride (final concentration = 67.6 g/L)
- 20x PBS (final concentration = 191 g/L)

The mixing times are determined by conductivity and visual inspection of the solution in the Flexel® Bag for Magnetic Mixer. The usual procedure for a buffer preparation includes before final dilution the incorporation of the powders in the bag partially filled with WFI. For our study, the bags were respectively filled to 80% of the nominal volume for the concentrated PBS and 90% for the TRI and Tris buffers.

The actual concentrations of salts during the mixing phase before the final dilution are:
– TRI buffer: 16 g/L
(fluid expansion due to the powders is negligible)
– Tris buffer: 73 g/L (density = 1.046 kg/L)
– 20x PBS: 224 g/L (density = 1.162 kg/L)

Then the final step of the process consists in the addition of water to achieve the expected buffer concentrations.

Materials and methods

The list of materials and equipments used for this application is:

1. Standard Flexel® Bag for Magnetic Mixer (50L: FMB114867, 200L: FMB114893, 1,000L: FMB114896)
2. Powder transfer bag 15L (ref. FMA114008)
3. Palletank® for LevMixer® and Magnetic mixer(1) (50 L: FXC110820, 200L: FXC110821, 1,000L: FXC113384)
4. Magnetic Mixer Drive Unit, 230V, EU power cord (ref. LT-DU-006-EU)
5. Powder bag holder 200-400-650L (ref. FXA114344)
6. SAFC® powders with the following formulations:
   TRI buffer (product number 44078 – dry powder packaging of 10 kg):
   – Citric acid anhydrous (0.04 g/L – 0.2 mM)
   – Sodium chloride (8.6 g/L – 147mM)
   – Sodium citrate, 2 H_2O (5.8 g/L – 20 mM)
   Tris buffer (product number 44077 – dry powder packaging of 10 kg):
   – Sodium chloride (58.44 g/L – 1M)
   – Tris (6.06 g/L – 50 mM)
   – Tris HCl (3.15 g/L – 20 mM)
   Concentrated 20x PBS (product number 44079 – dry powder packaging of 10 kg):
   – Potassium chloride (4 g/L – 54 mM)
   – Potassium phosphate, monobasic, anhydrous (4 g/L – 29 mM)
   – Sodium chloride (160 g/L – 2.7 M)
   – Sodium phosphate, dibasic, anhydrous (23 g/L – 162 mM).
7. Conductivity sensor: WTW InoLab Cond 740i

Method used:

1. The buffer is prepared in standard Flexel® Bags for Magnetic Mixer filled with deionised water to 80% of the final volume for the concentrated PBS, and 90% of the final volume for the Tris and TRI buffers.
2. Impeller speed is set to the maximum speed of 300 rpm to optimize the powders hydration and dispersion.
3. The powders are incorporated in the Flexel® Bags for Magnetic Mixer using either:
   – SAFC® packaging for dry powder,
   – or Sartorius Stedim Biotech 15 L powder transfer bag for a contained transfer to the mixing bag assembly.
4. Two mixing times are monitored from the addition of buffer powders:
   4.1 "mixing time 1" is determined from the conductivity signal as follows:
   The "mixing time 1" corresponds to the time when 95% of the final value is reached and when all next measurements stay within a 5% tolerance (see Fig. 1).

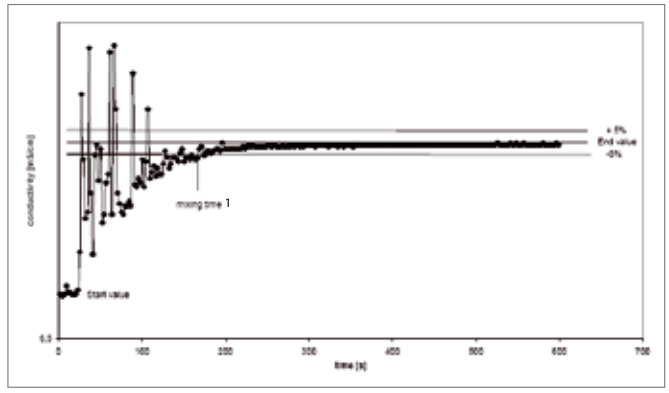

Fig. 1: General principle of mixing time determination via conductivity

   4.2 "mixing time 2" is determined by a visual inspection.
   The "mixing time 2" corresponds to the time when all suspended particles are visually dissolved.

Results and discussions

1. Mixing performances vs. volume of buffer preparation

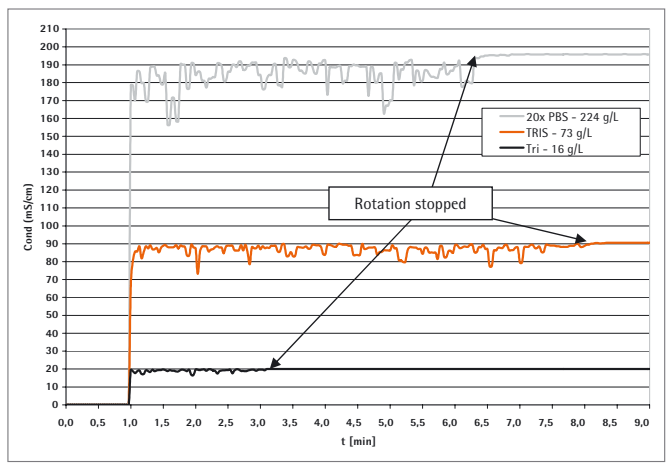

Fig. 2: Buffer preparations in 50L Flexel® Bag for Magnetic Mixer

50 L Flexel® Bag for Magnetic Mixer: the vortex at 300 rpm in the 50L bag volume resulted in the generation of air bubbles that interfered with conductivity measurement with air trapped in the conductivity cell. The conductivity was not unwavering even though mixing was completed. A stable value of the conductivity could be observed only at lower impeller rotation speed. Therefore mixing time cannot be precisely defined using the conductivity signal. The mixing time is at least as good as with the larger scale.

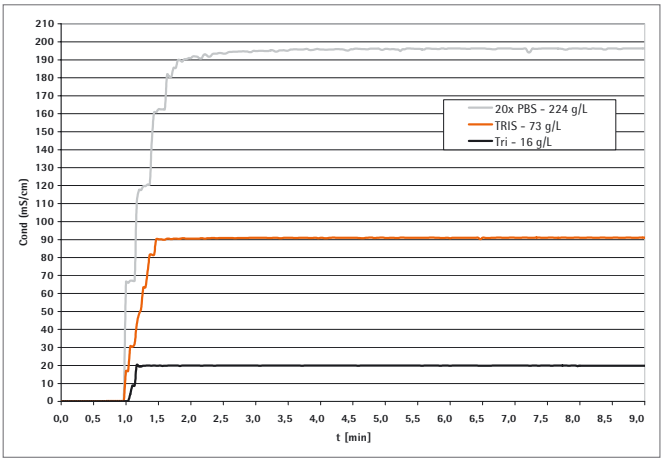

Fig. 3: Buffer preparations in 200L Flexel® Bag for Magnetic Mixer

200L Flexel® Bag for Magnetic Mixer: 4 SAFC® bucket liners were used to transfer 38.2 kg of PBS into the mixing bag as shown by the multiple steps on the conductivity signal for PBS buffer preparation (see Fig. 3). A single Sartorius Stedim Biotech powder transfer bag was used for the preparation of Tris (13.5 kg) and sodium citrate | citric acid (2.9 kg), which is reflected by continuous increase of conductivity signal. A stable plateau conductivity value was then quickly achieved for the three buffers, indicative of the mixing completion.

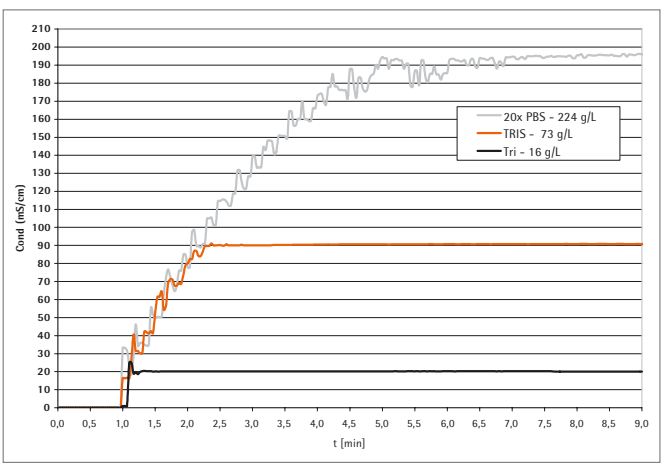

Fig. 4: Buffer preparations in 1,000L Flexel® Bag for Magnetic Mixer

1,000L Flexel® Bag for Magnetic Mixer: 19 SAFC® bucket liners were used to transfer 191 kg of PBS, 7 liners for the Tris (66.7 kg) and a single one for the sodium citrate | citric acid (14.4 kg). The multiple powder addition steps are visible on the conductivity graph (see Fig. 4). Again a stable value of conductivity was monitored at the mixing completion.

2. Mixing performances vs buffer type – determination of the mixing times

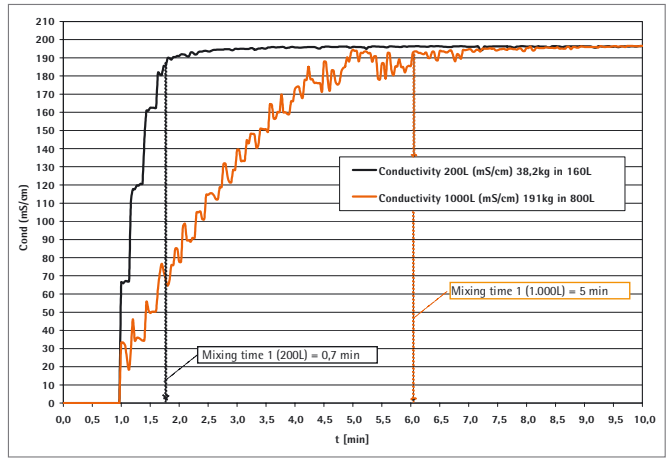

Fig. 5: PBS 20x buffer preparation in Flexel® Bag for Magnetic Mixer

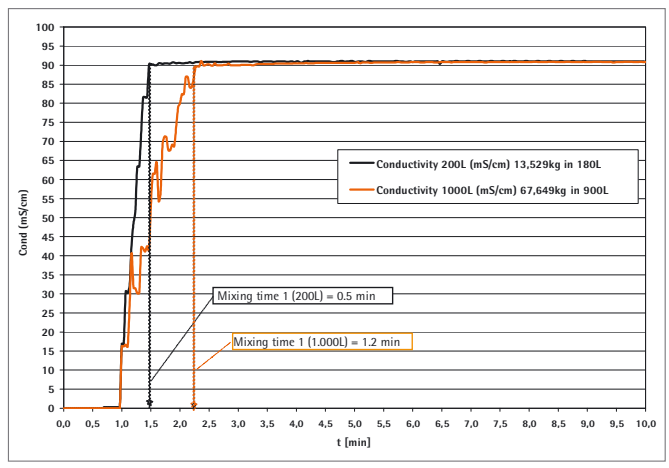

Fig. 6: TRIS buffer preparation in Flexel® Bag for Magnetic Mixer

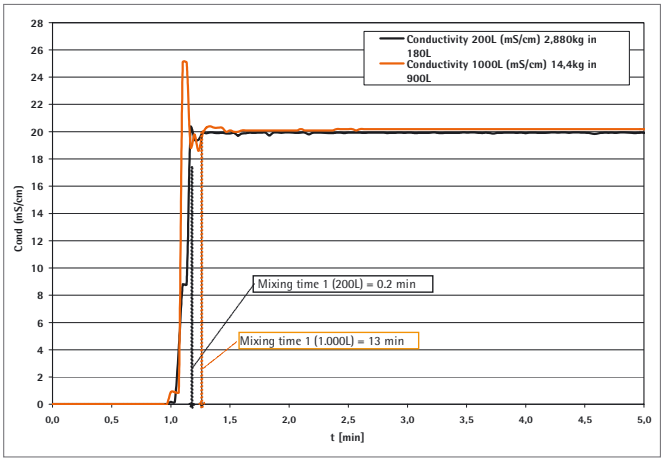

Fig. 7: Sodium citrate | citric acid/NaCl buffer preparation in Flexel® Bag for Magnetic Mixer

Buffer powders \ Bag Volume (L)		50	200	1000
Citric Acid Sodium Citrate NaCl (16.0 g/L)	Based on conductivity		0,2 min	0,3 min
	Based on visual inspection	<5 min	<5 min	<5 min
Tris Tris HCl NaCl (73.0 g/L)	Based on conductivity		0,5 min	1,2 min
	Based on visual inspection	<5 min	6 min	10 min
20x PBS (224.0 g/L)	Based on conductivity		0,7 min	5 min
	Based on visual inspection	13 min	14 min	20 min

Fig. 8: Overview on mixing times via conductivity and visual inspection

* conductivity values not stable at 50L due to presence of air bubbles around the conductivity cell (strong vortex)

200L Palletank® for Magnetic Mixer equipped with the powder transfer bag for the mixing trial

General comments:

- The mixing times reported in this study include the transfer time of the multiple Sartorius Stedim Biotech powder transfer bags (for the 200 L scale experiment) or SAFC® bucket liners (50 and 1,000 L experiments) into the mixing bag assembly.
- A rapid dissolution of the powder salts was observed for the three buffers thanks to the strong mixing torque at 300 rpm (see Fig. 5-7).
- For the 200 L and 1,000 L volume, the conductivity of the solutions reaches a stable value in few minutes. However, some fine particulates of salt can still be visually observed in the solution. The agitation at 300 rpm was maintained until the solution became totally clear. This visual control is facilitated by the large windows of the Palletank®.
- For all cases a 20 x increase in buffer preparation volumes (50L to 1,000 L) only leads to a 2x increase in the mixing times.
- The worst-case buffer preparation condition (1,000 L 20X PBS with mixing of 191 kg of salts in 800 L of water) resulted in a mixing time of 20 min.
- To the mixing times presented in Fig. 8, additional time for equipment set up and water filling to 80% as well as time for filling after mixing from 80 to 100% to reach final volume and concentration should be taken into consideration for total process time calculation.

Conclusion

- Large volume buffer solutions are quick and easy to prepare using the combination of ready to use SAFC® buffer formulations and the high efficiency mixing of the Flexel® with Magnetic Mixer Technology.
- The contained processing conditions with the closed powder transfer bag docked onto the sterile Flexel® Bag for Magnetic Mixer are favourable to maintain low bioburden and to reduce the minimum exposure of the operator to chemicals.
- The platform provides a single-use scalable buffer preparation capability with a range of Flexel® Bags including volumes of 50L, 100 L, 200 L, 400 L, 650 L and 1,000 L.
- Flexel® for Magnetic Mixing system integrated in a FlexAct BP system provides monitoring and automation capability to better control all the operations of a buffer preparation step.

(1) This product uses ATMI patented Magnetic Mixer.

Sartorius Stedim Biotech Sales and Service Contacts

For further contacts, visit www.sartorius-stedim.com

Europe

Germany
Sartorius Stedim Biotech GmbH
August-Spindler-Strasse 11
37079 Goettingen

Phone +49.551.308.0
Fax +49.551.308.3289

www.sartorius-stedim.com

Sartorius Stedim Systems GmbH
Schwarzenberger Weg 73–79
34212 Melsungen

Phone +49.5661.71.3400
Fax +49.5661.71.3702

www.sartorius-stedim.com

France
Sartorius Stedim Biotech S.A.
ZI Les Paluds
Avenue de Jouques – BP 1051
13781 Aubagne Cedex

Phone +33.442.845600
Fax +33.442.845619

Sartorius Stedim France SAS
ZI Les Paluds
Avenue de Jouques – CS 71058
13781 Aubagne Cedex

Phone +33.442.845600
Fax +33.442.846545

Austria
Sartorius Stedim Austria GmbH
Franzosengraben 12
A-1030 Vienna

Phone +43.1.7965763.18
Fax +43.1.796576344

Belgium
Sartorius Stedim Belgium N.V.
Leuvensesteenweg, 248/B
1800 Vilvoorde

Phone +32.2.756.06.80
Fax +32.2.756.06.81

Denmark
Sartorius Stedim Nordic A/S
Hoerskaetten 6D, 1.
DK-2630 Taastrup

Phone +45.7023.4400
Fax +45.4630.4030

Hungary
Sartorius Stedim Hungária Kft
Kagyló u. 5
2092 Budakeszi

Phone +36.23.457.227
Fax +36.23.457.147

Italy
Sartorius Stedim Italy S.p.A.
Via dell'Antella, 76/A
50012 Antella-Bagno a Ripoli (FI)

Phone +39.055.63.40.41
Fax +39.055.63.40.526

Netherlands
Sartorius Stedim Netherlands B.V.
Edisonbaan 24
3439 MN Nieuwegein

Phone +31.30.6025080
Fax +31.30.6025099

Poland
Sartorius Stedim Poland Sp. z o.o.
ul. Wrzesinska 70
62-025 Kostrzyn

Phone +48.61.647.38.40
Fax +48.61.879.25.04

Spain
Sartorius Stedim Spain SA
C/Isabel Colbrand 10,
Oficina 70
Polígono Industrial de Fuencarral
28050 Madrid

Phone +34.90.2110935
Fax +34.91.3589623

Switzerland
Sartorius Stedim Switzerland AG
Ringstr. 24 a
8317 Tagelswangen

Phone +41.52.354.36.36
Fax +41.52.354.36.46

U.K.
Sartorius Stedim UK Limited
Longmead Business Park
Blenheim Road, Epsom
Surrey KT19 9 QQ

Phone +44.1372.737159
Fax +44.1372.726171

America

USA
Sartorius Stedim North America Inc.
5 Orville Drive
Bohemia, NY 11716

Toll-Free +1.800.368.7178
Fax +1.631.254.4253

Sartorius Stedim SUS Inc.
1910 Mark Court
Concord, CA 94520

Phone +1.925.689.6650
Toll Free +1.800.914.6644
Fax +1.925.689.6988

Sartorius Stedim Systems Inc.
201 South Ingram Mill Road
Springfield, MO 65802

Phone +1.417.873.9636
Fax +1.417.873.9275

Argentina
Sartorius Argentina S.A.
Int. A. Avalos 4251
B1605ECS Munro
Buenos Aires

Phone +54.11.4721.0505
Fax +54.11.4762.2333

Brazil
Sartorius do Brasil Ltda
Av. Dom Pedro I, 241
Bairro Vila Pires
Santo André
São Paulo
Cep 09110-001

Phone +55.11.4451.6226
Fax +55.11.4451.4369

Mexico
Sartorius de México S.A. de C.V.
Circuito Circunvalación Poniente No. 149
Ciudad Satélite
53100 Naucalpan, Estado de México

Phone +52.5555.62.1102
Fax +52.5555.62.2942

Asia | Pacific

Australia
Sartorius Stedim Australia Pty. Ltd.
Unit 5, 7-11 Rodeo Drive
Dandenong South Vic 3175

Phone +61.3.8762.1800
Fax +61.3.8762.1828

China
Sartorius Stedim Beijing
Representative Office
No. 33, Yu'an Road,
Airport Industrial Zone B, Shunyi District
Beijing 101300

Phone +86.10.80426516
Fax +86.10.80426580

Sartorius Stedim Shanghai
Represantative Office
Room 618, Tower 1, German Centre,
Shanghai, PRC., 201203

Phone +86.21.28986393
Fax +86.21.28986392.11

Sartorius Stedim Guangzhou Office
Room 704, Broadway Plaza,
No. 233–234 Dong Feng West Road
Guangzhou 510180

Phone +86.20.8351.7921
Fax +86.20.8351.7931

India
Sartorius Stedim India Pvt. Ltd.
#69/2-69/3, Jakkasandra
Kunigal Road, Nelamangala Tq
Bangalore – 562 123

Phone +91.80.4350.5361
Fax +91.80.4350.5253

Japan
Sartorius Stedim Japan K.K.
KY Building, 8–11
Kita Shinagawa 1-chome
Shinagawa-ku
Tokyo 140-0001

Phone +81.3.3740.5407
Fax +81.3.3740.5406

Malaysia
Sartorius Stedim Malaysia Sdn. Bhd.
Lot L3-E-3B, Enterprise 4
Technology Park Malaysia
Bukit Jalil
57000 Kuala Lumpur

Phone +60.3.8996.0622
Fax +60.3.8996.0755

Singapore
Sartorius Stedim Singapore Pte. Ltd.
1 Science Park Road,
The Capricorn, #05-08A,
Singapore Science Park 2
Singapore 117528

Phone +65.6872.3966
Fax +65.6778.2494

SAFC® Sales and contact information

SAFC®
3050 Spruce Street
Saint Louis, MO 63103 USA

Phone 800.255.6032
info-na@sial.com

SAFC®
Second Avenue
Heatherhouse Industrial Estate
Irvine, Scotland KA12 8NB

Phone +44.1294.204444
info-eu@sial.com

www.safcglobal.com

www.sartorius-stedim.com

Specifications subject to change without notice. Printed in Germany on paper that has been bleached without any use of chlorine. W
Publication No.: SL-1079-e11124 · Order No.: 85032-537-95 · Ver. 12 | 2011